



Rottweg 17 • D 48683 Ahaus  
Tel. (0 25 61) 93 84-0  
Fax (0 25 61) 93 84 36  
Internet: [www.ab-maschinen.de](http://www.ab-maschinen.de)  
E-Mail: [info@ab-maschinen.de](mailto:info@ab-maschinen.de)

Schweißtechnik  
Lagereinrichtungen  
Industriebedarf  
Werksvertretungen  
Gebrauchtmaschinen

## FALKEN PK 25 (1008-8405558)



**Control type**  
konventionell

**Machine no.**  
1008-8405558

**Make**  
FALKEN

**Location**  
Ahaus

- Can be used for bending pipes and profile materials
- Including standard rollers for round bending of square materials
- The top roller is set using an easily visible mm scale
- As standard with foot pedal to control the right and left rotation
- Can be used both horizontally and vertically
- Bending rolls hardened and ground



### Furnishing:

- Machine base
- standard rollers (divided)
- Lateral straightening rollers
- Foot switch with emergency stop
- Scale for top roller adjustment
- CE mark / declaration of conformity
- Operating instructions in German

## Machine attributes

diameter:	Welle 30,0 mm
bending speed:	2,5 m/min
total power requirement:	1,1 kW
voltage:	400 V
weight:	230 kg
range L-W-H:	950 x 1350 x 800 mm

## Machine images

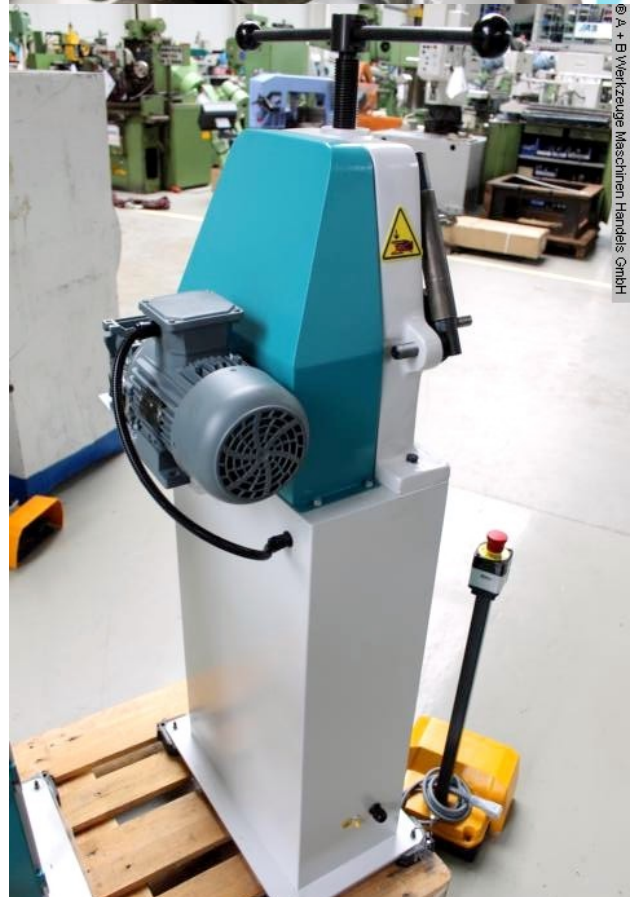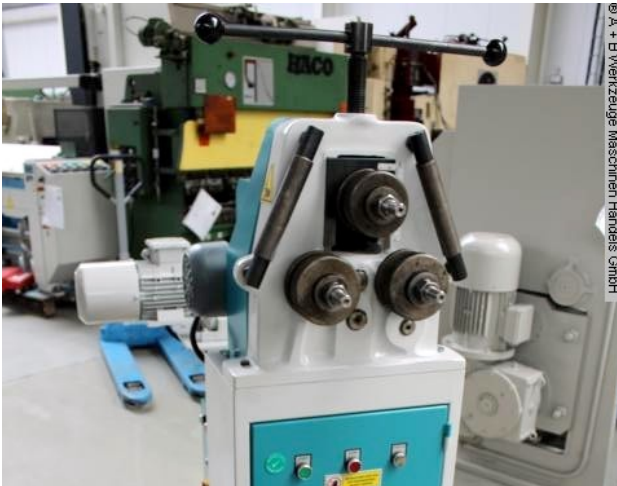




Rottweg 17 • D 48683 Ahaus  
 Tel. (0 25 61) 93 84-0  
 Fax (0 25 61) 93 84 36  
 Internet: www.ab-maschinen.de  
 E-Mail: info@ab-maschinen.de

Schweißtechnik  
 Lagereinrichtungen  
 Industriebedarf  
 Werksvertretungen  
 Gebrauchtmachines



© A + B Werkzeuge Maschinen Handels GmbH

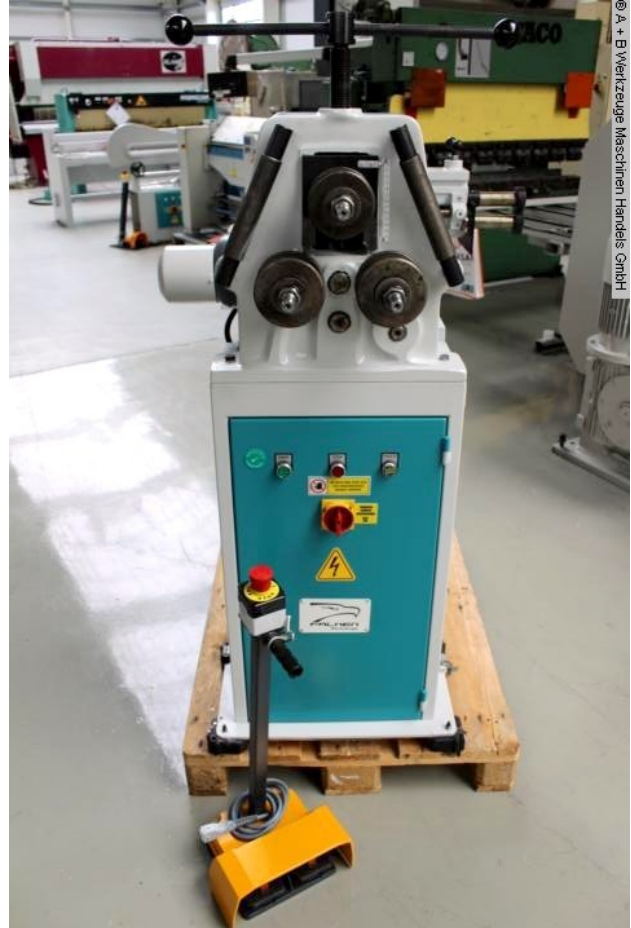

© A + B Werkzeuge Maschinen Handels GmbH

RBM 25 / RBM 25 M			
Profile*	Dimension mm	min. Ø	Rolls
1	35 x 35 x 4 30 x 30 x 4	800 400	B6
2	35 x 35 x 4 30 x 30 x 4	800 400	B6
3	35 x 35 x 4 30 x 35 x 4	600 400	A
4	35 x 35 x 4,0 30 x 30 x 4,0	600 400	A
5			
6	30 x 10 20 x 5	500 190	A
7	50 x 10 20 x 5	400 160	A
8	20 x 20 10 x 10	500 160	A
9	Ø 27 Ø 17	500 160	B1
10	Ø 31,8 x 2,9 Ø 26,9 x 2,6	700 500	B2
11	Ø 1" x 2 Ø 3/4" x 1,6	800 400	B3
12	38 x 20 x 2 30 x 15 x 1,5	1000 600	B4
13	30 x 30 x 2 20 x 20 x 2	900 600	B5
A: Standard rolls / B: Special rolls			

\* Yield strength 24 kg / mm<sup>2</sup>